




Main features


- Temperature limits: - 40 ... + 250° C
(see table for the type of used thermocouple cable)
- Tolerance: Norme UNI 7937, IEC 751:
± 0.15° C to 0° C for class A (1/2 DIN)
± 0.30° C to 0° C for class B (1 DIN)
- Stainless steel AISI 303 sheath
- Adjustment spring thread connection: 8mm diameter, 300mm length

MODELS

with bayonet fitting

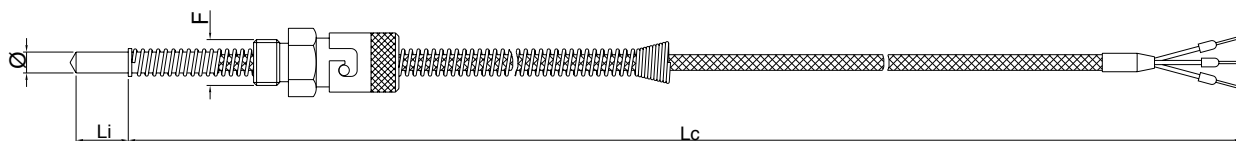

ORDER CODE

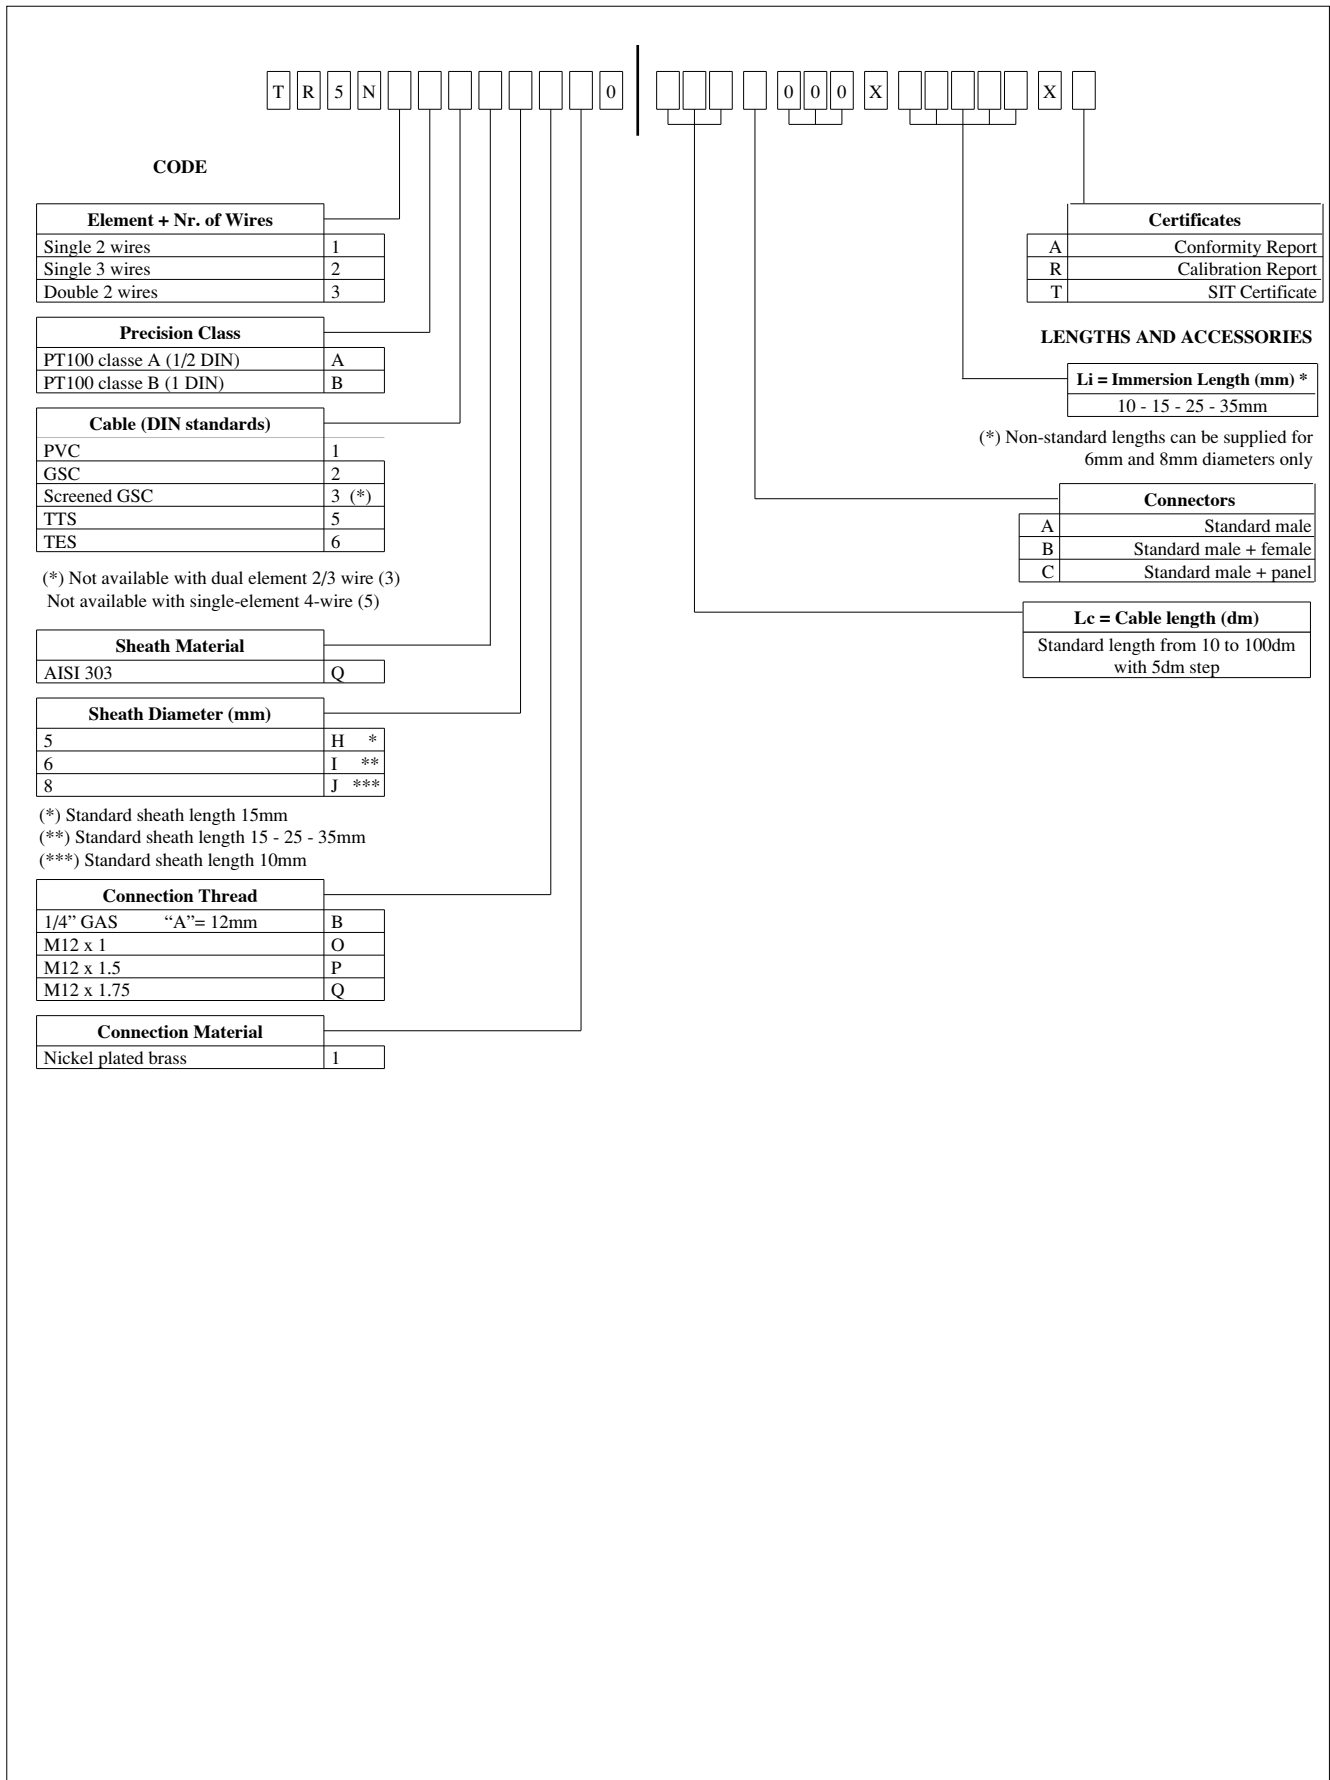

GEFRAN spa reserves the right to make any kind of design or functional modification at any moment without prior notice

GEFRAN spa
 via Sebina, 74
 25050 PROVAGLIO D'ISEO (BS) - ITALIA
 ph. 0309888.1 - fax. 0309839063
 Internet: <http://www.gefran.com>
www.gefranonline.com

GEFRAN

DTS_TR5N_07-2013_ENG