




### Main features


- Temperature limits: - 40 ... + 250° C (see table for type of extension cable used)
- Tolerance: UNI 7937, IEC 751 standards:  
± 0.15° C at 0° C for class A (1/2 DIN)  
± 0.30° C at 0° C for class B (1 DIN)
- PT100 at 0° C sensor
- Stainless steel AISI 303 sheath
- Adjustment spring thread connection: 8mm diameter, 300mm length

### MODELS


TR5 B: with bayonet fitting

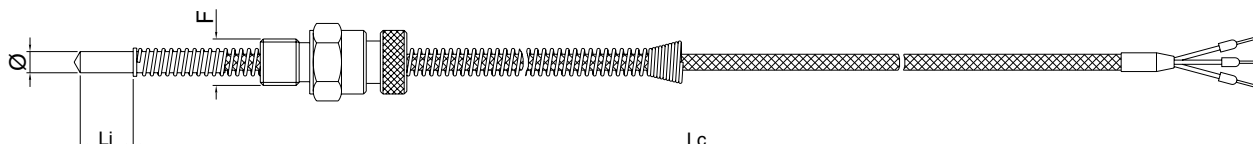

TR5 V: with screw fitting

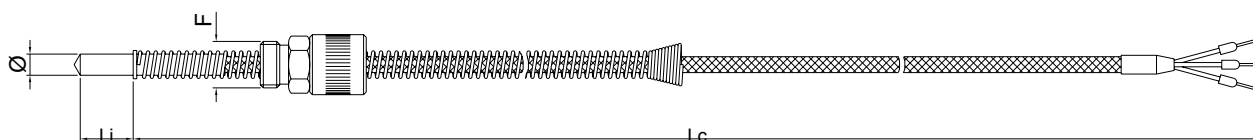

# ORDER CODE

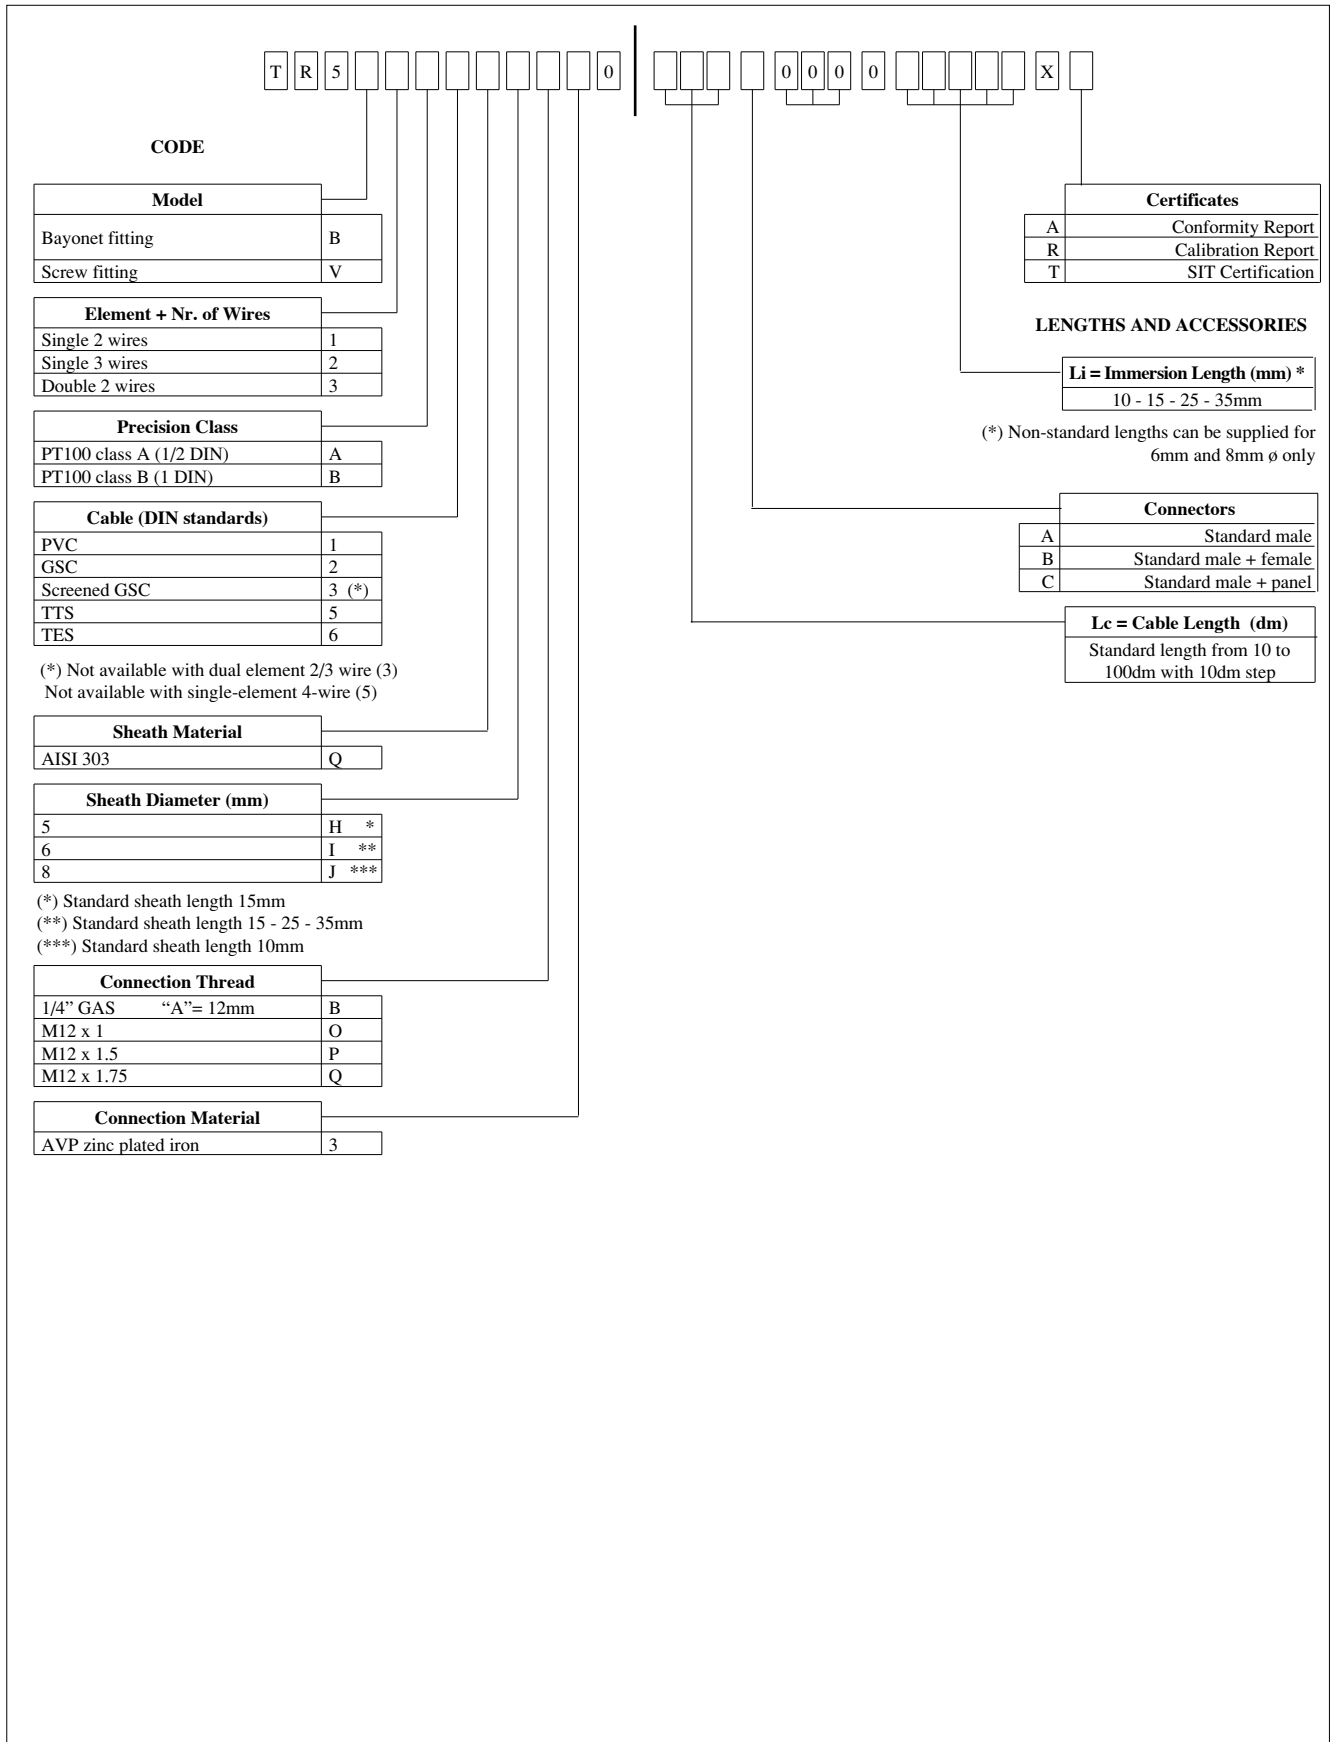

GEFRAN spa reserves the right to make any kind of design or functional modification at any moment without prior notice

**GEFRAN**

**GEFRAN spa**  
 via Sebina, 74  
 25050 PROVAGLIO D'ISEO (BS) - ITALIA  
 ph. 0309888.1 - fax. 0309839063  
 Internet: <http://www.gefran.com>  
[www.gefranonline.com](http://www.gefranonline.com)

DTS\_TR5\_07-2013\_ENG